



⚠ WARNING



The cords on this product present a potential strangulation hazard.



For child safety, consider cordless alternatives or products with inaccessible cords.

TOOLS NEEDED


Marking pencil, tape measure, drill

PACKAGE CONTENTS

One Roller Shade

One hardware kit containing:


- One ball chain clutch mechanism with attached chain tensioning device
- One left side bracket with circular opening
- One right side bracket with square opening
- Six screws

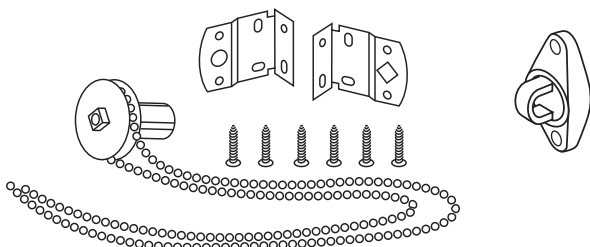

INSTALLATION

See installation and operation video at www.youtube.com/user/GreenMountainVista

Shade can be *inside* or *outside* mounted.

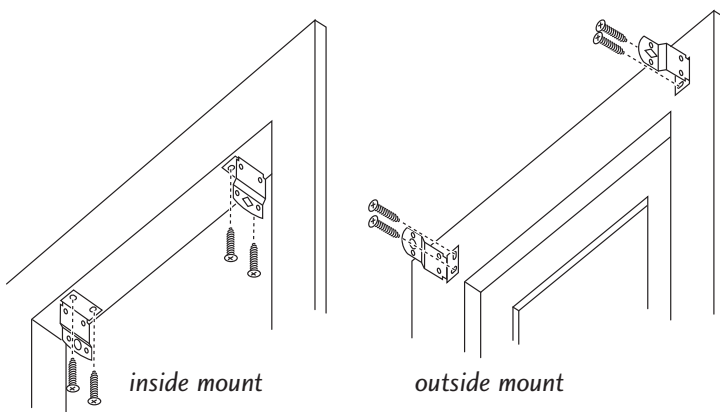

Step 1:


Measure for bracket location: The space between the outer edge of the left side bracket and the outer edge of the right side bracket will be the same as the width listed on the package. The distance will be 34" if you purchased a 34" wide shade. Once you have measured and marked for bracket location, hold bracket to desired location and pre-drill screw holes.

Step 2:

Install brackets (inside or outside mount, as shown above). The bracket with the circular opening should be mounted on the left side. The bracket with the square opening should be mounted on the right side.

Step 3:



Install clutch mechanism into the right hand side of the shade.



Step 4:

Insert shade into brackets:

Making sure that the opening for the chain is facing downward, insert the square fitting into the mounted bracket on the right.




Depress the round fitting on the left side of the shade and slide into position on the mounted bracket on the left side. You will feel the left side click into place.

Step 5:

Install chain tensioner:

Your roller shade is lifted and lowered using a continuous bead chain. If unsecured, this bead chain poses a strangulation hazard to infants and young children.

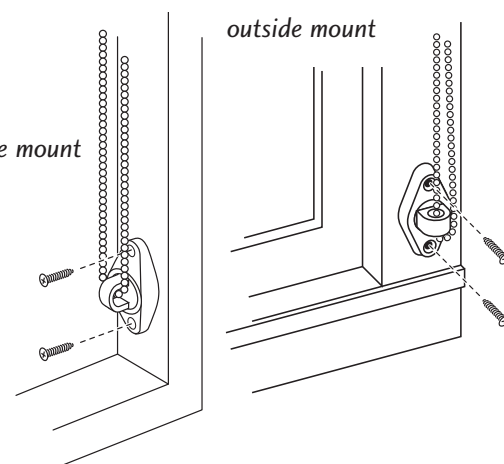

The bead chain comes equipped with a cord tensioning device which attaches the bead chain to the window frame or wall. This shade has been designed in a way that will prevent the shade from being able to be fully lowered unless the cord tensioning device is properly installed. If there is no cord tensioning device attached to the bead chain, do not attempt to install the product and contact Green Mountain Vista for further instructions.

Before you attach the tension device to the window frame or wall you will need to:

Cut the zip tie that attaches the tensioner to the bead chain. Apply pressure to the spring and lower the tension device to the bottom of the bead chain.

Then:

Attach tensioner to the window frame or wall as illustrated.

Tensioner should be positioned where it will hold the chain as taught as possible without inhibiting the free movement of the chain through the tensioner.

As previously mentioned, if there is no tension device or if you can not install as illustrated, do not attempt to install the product and contact Green Mountain Vista for further instructions.

This product comes with screws that are made to mount the product on wood or similar substrate. If you intend to mount the brackets or cord tensioning device to sheet rock you will need to procure the proper sheet rock anchors from your local hardware store. If you intend to mount the brackets or cord tensioner to a steel window frame, you will need to procure the appropriate screws from your local hardware store. If you have any questions please contact Green Mountain Vista at (802) 862-0159.